




REVISIONS			
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE	

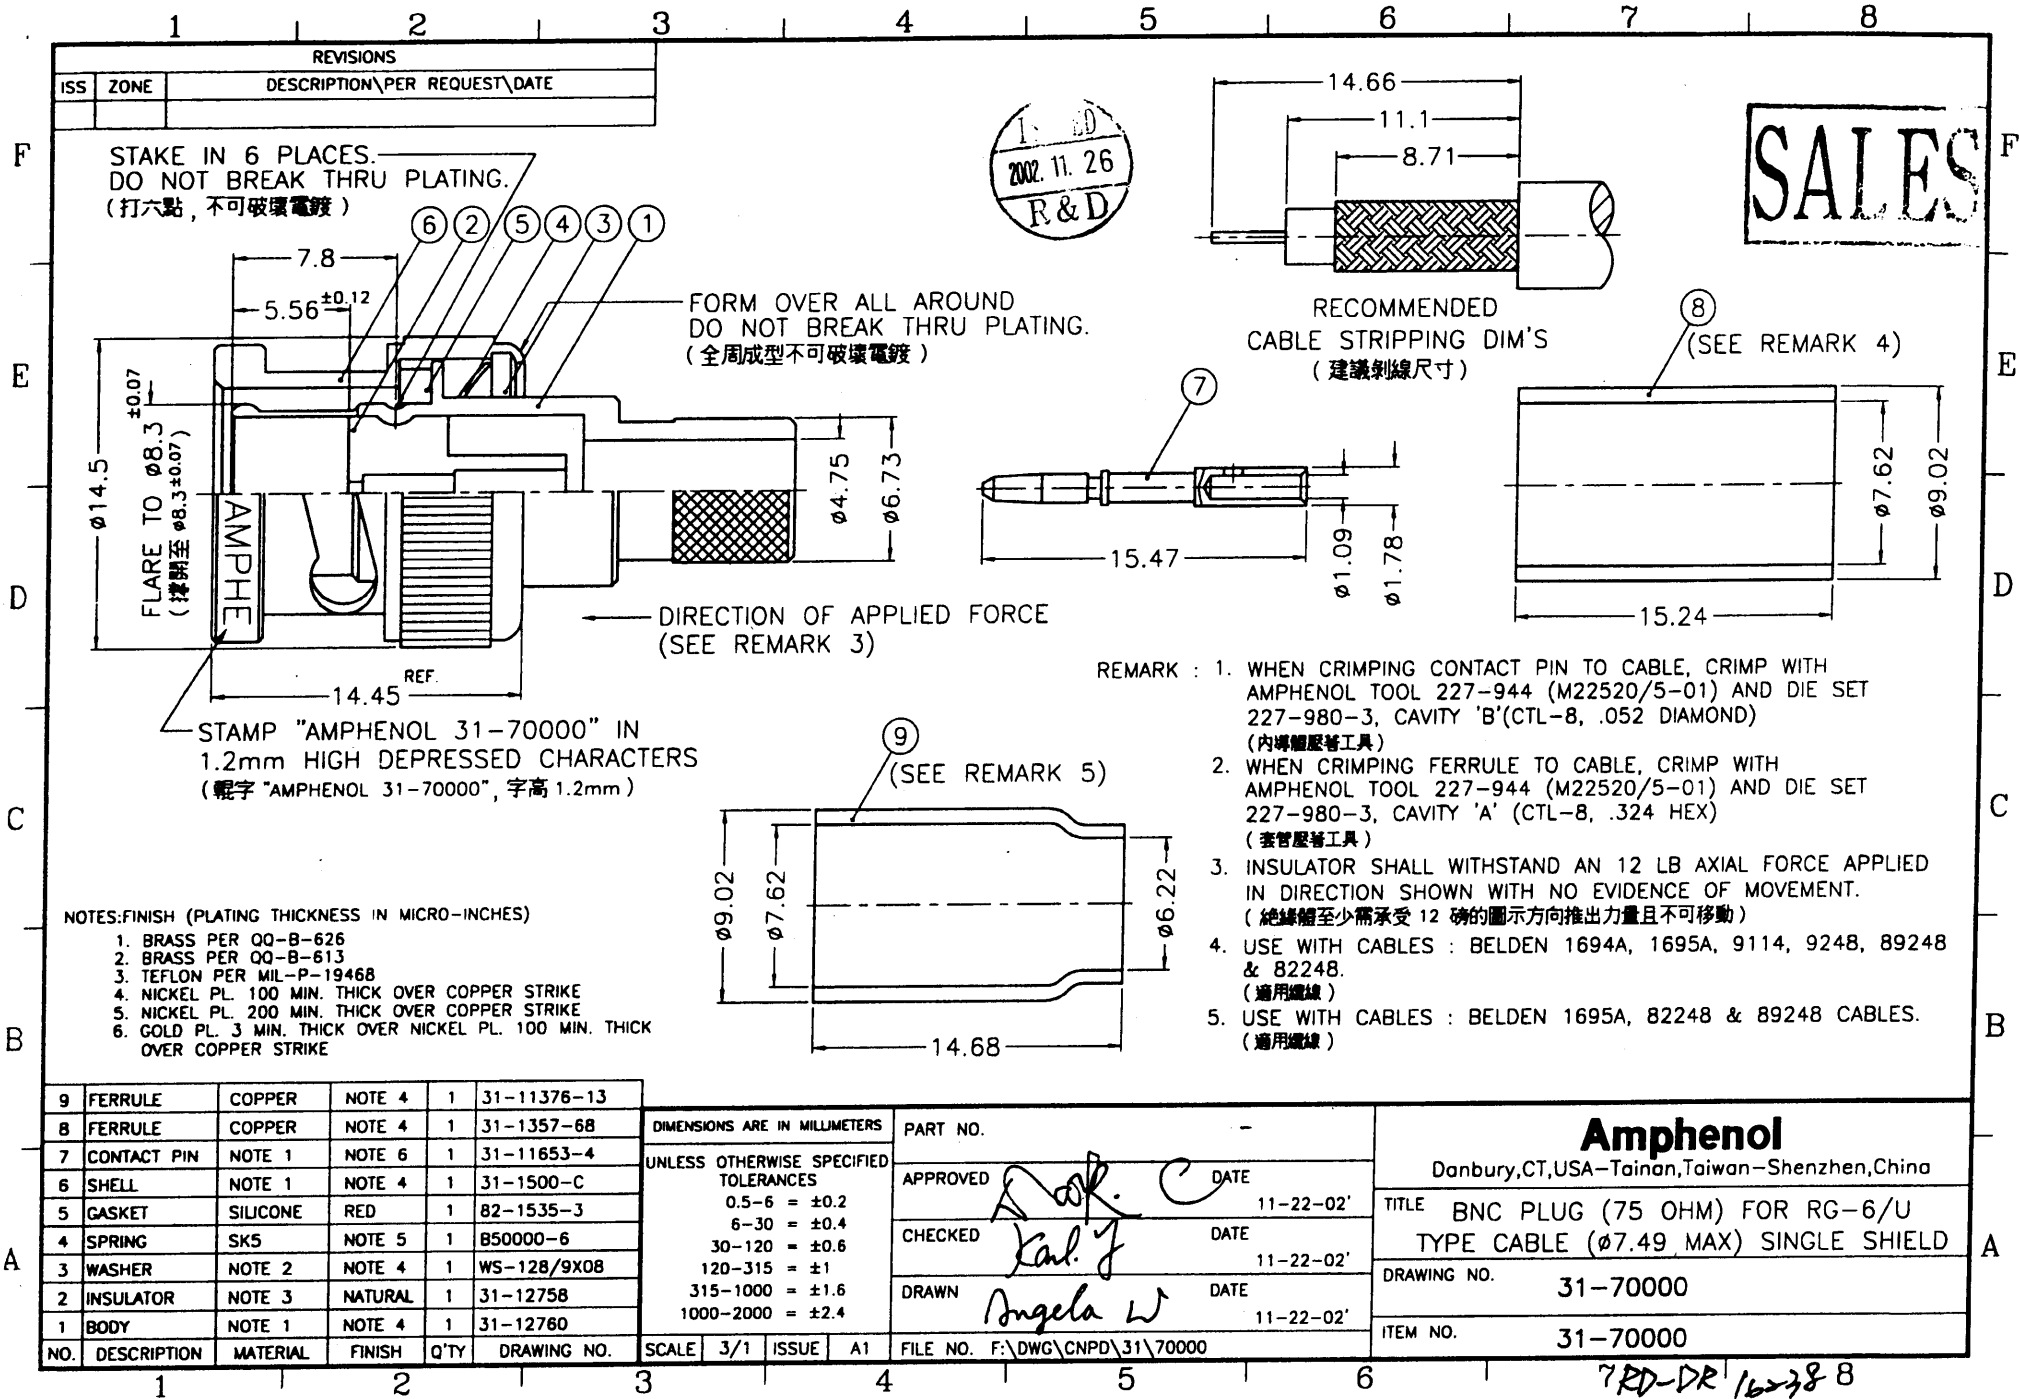

SALES

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- 1. BRASS PER QQ-B-626
 - 2. BRASS PER QQ-B-613
 - 3. TEFLON PER MIL-P-19468
 - 4. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - 5. NICKEL PL. 200 MIN. THICK OVER COPPER STRIKE
 - 6. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE

- REMARK :
- 1. WHEN CRIMPING CONTACT PIN TO CABLE, CRIMP WITH AMPHENOL TOOL 227-944 (M22520/5-01) AND DIE SET 227-980-3, CAVITY 'B' (CTL-8, .052 DIAMOND) (內導線壓管工具)
 - 2. WHEN CRIMPING FERRULE TO CABLE, CRIMP WITH AMPHENOL TOOL 227-944 (M22520/5-01) AND DIE SET 227-980-3, CAVITY 'A' (CTL-8, .324 HEX) (套管壓管工具)
 - 3. INSULATOR SHALL WITHSTAND AN 12 LB AXIAL FORCE APPLIED IN DIRECTION SHOWN WITH NO EVIDENCE OF MOVEMENT. (絕緣體至少需承受 12 磅的圖示方向推出力量且不可移動)
 - 4. USE WITH CABLES : BELDEN 1694A, 1695A, 9114, 9248, 89248 & 82248. (適用線線)
 - 5. USE WITH CABLES : BELDEN 1695A, 82248 & 89248 CABLES. (適用線線)

9	FERRULE	COPPER	NOTE 4	1	31-11376-13
8	FERRULE	COPPER	NOTE 4	1	31-1357-68
7	CONTACT PIN		NOTE 6	1	31-11653-4
6	SHELL		NOTE 4	1	31-1500-C
5	GASKET	SILICONE	RED	1	82-1535-3
4	SPRING	SK5		1	850000-6
3	WASHER		NOTE 4	1	WS-128/9X08
2	INSULATOR		NOTE 3	1	31-12758
1	BODY		NOTE 4	1	31-12760
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED TOLERANCES

0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

PART NO.	
APPROVED	DATE 11-22-02'
CHECKED	DATE 11-22-02'
DRAWN	DATE 11-22-02'
FILE NO.	F:\DWG\CNPD\31\70000

Amphenol	
Danbury,CT,USA-Tainan,Taiwan-Shenzhen,China	
TITLE	BNC PLUG (75 OHM) FOR RG-6/U TYPE CABLE (Ø7.49 MAX) SINGLE SHIELD
DRAWING NO.	31-70000
ITEM NO.	31-70000

7RD-DR 16238 B