


F
E
D
C
B
A

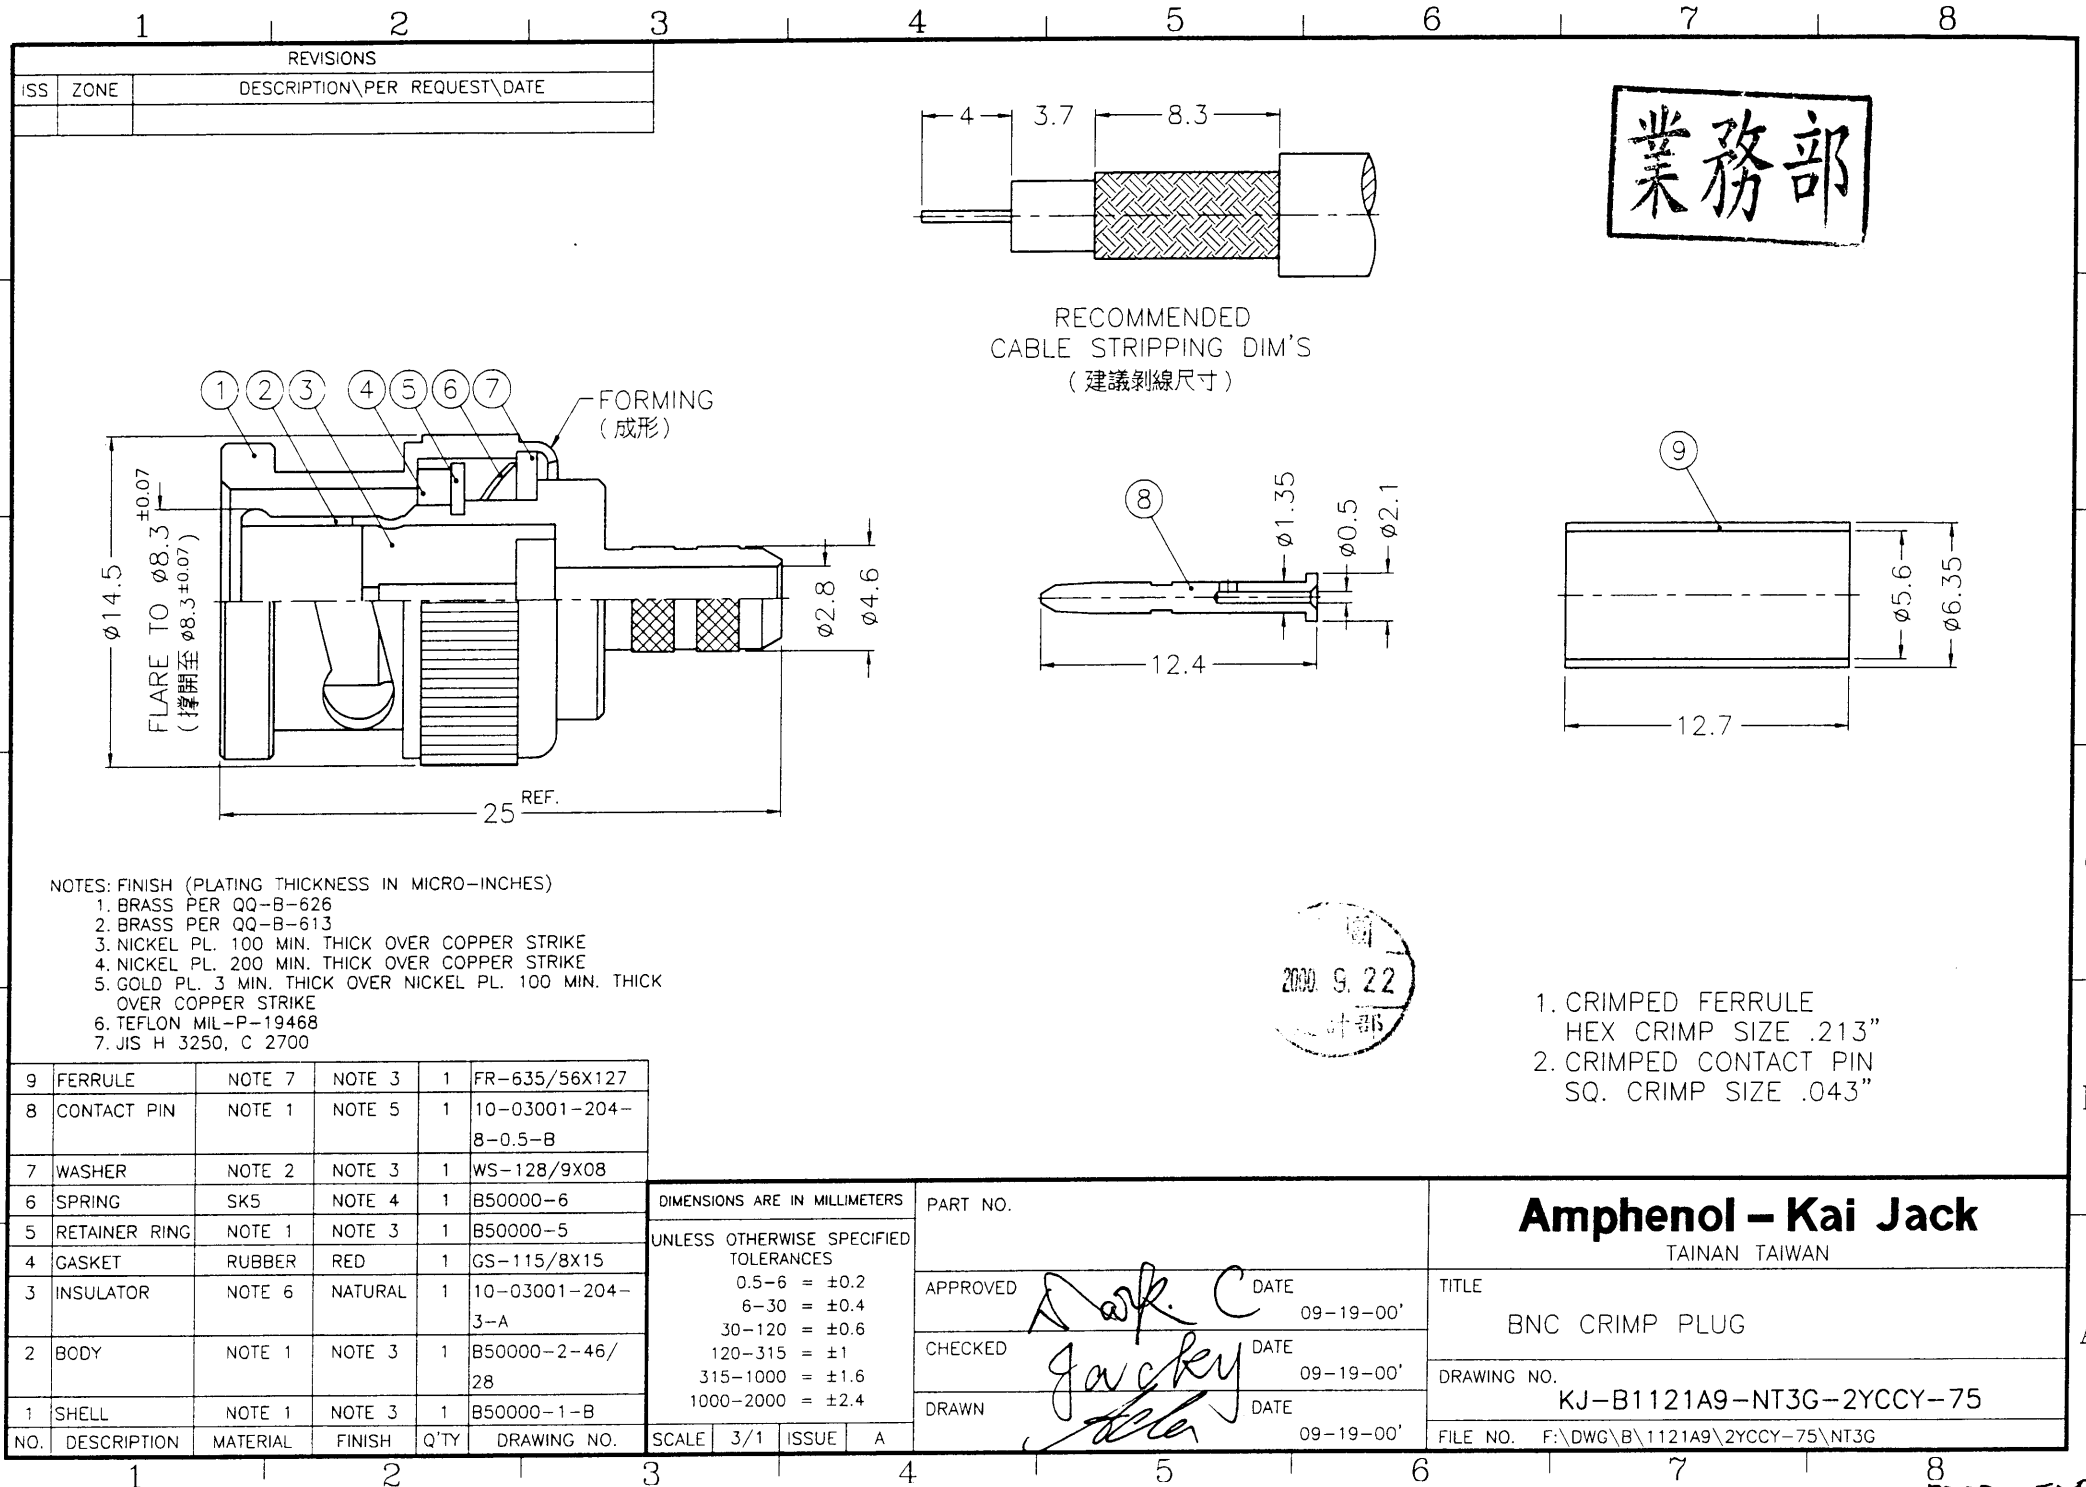

業務部

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2. BRASS PER QQ-B-613
3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. NICKEL PL. 200 MIN. THICK OVER COPPER STRIKE
5. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
6. TEFLON MIL-P-19468
7. JIS H 3250, C 2700

9	FERRULE	NOTE 7	NOTE 3	1	FR-635/56X127
8	CONTACT PIN	NOTE 1	NOTE 5	1	10-03001-204-8-0.5-B
7	WASHER	NOTE 2	NOTE 3	1	WS-128/9X08
6	SPRING	SK5	NOTE 4	1	B50000-6
5	RETAINER RING	NOTE 1	NOTE 3	1	B50000-5
4	GASKET	RUBBER	RED	1	GS-115/8X15
3	INSULATOR	NOTE 6	NATURAL	1	10-03001-204-3-A
2	BODY	NOTE 1	NOTE 3	1	B50000-2-46/28
1	SHELL	NOTE 1	NOTE 3	1	B50000-1-B
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS			
UNLESS OTHERWISE SPECIFIED TOLERANCES			
0.5-6	=	±0.2	
6-30	=	±0.4	
30-120	=	±0.6	
120-315	=	±1	
315-1000	=	±1.6	
1000-2000	=	±2.4	
SCALE	3/1	ISSUE	A

PART NO.	
APPROVED	DATE 09-19-00'
CHECKED	DATE 09-19-00'
DRAWN	DATE 09-19-00'

Amphenol - Kai Jack	
TAINAN TAIWAN	
TITLE	
BNC CRIMP PLUG	
DRAWING NO.	
KJ-B1121A9-NT3G-2YCCY-75	
FILE NO.	F:\DWG\B\1121A9\2YCCY-75\NT3G