

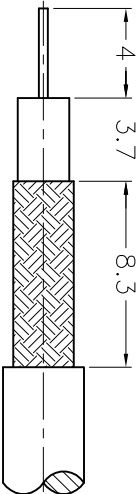
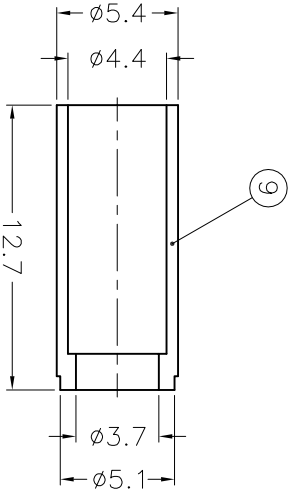


1		2	3	4	5	6	7	8
ISS		REVISIONS						
ZONE		DESCRIPTION\PER REQUEST\DATE						

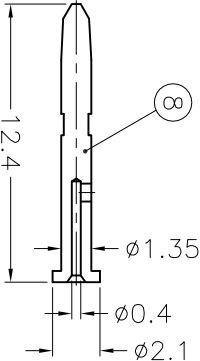

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

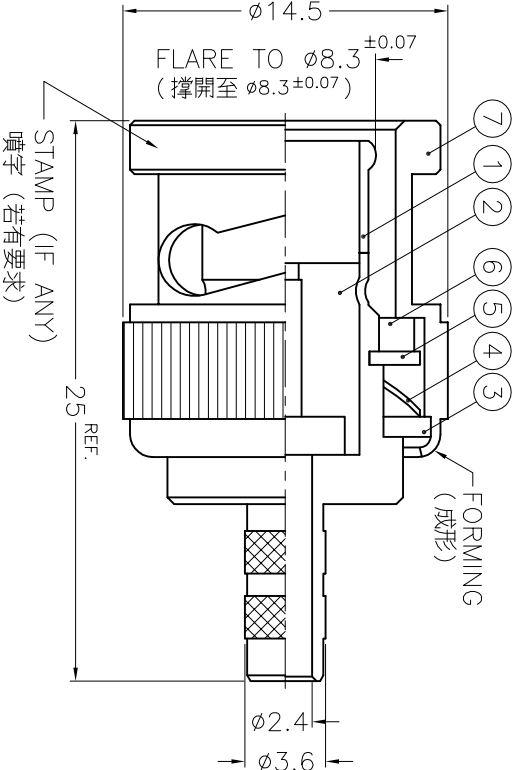

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2. BRASS PER QQ-B-613
3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. NICKEL PL. 200 MIN. THICK OVER COPPER STRIKE
5. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
6. TEFLON MIL-P-19468

1. CRIMPED FERRULE
HEX CRIMP SIZE .178"
2. CRIMPED CONTACT PIN
SQ. CRIMP SIZE .043"

9	FERRULE	NOTE 1	NOTE 3	1	FR-54/44-51/37 X127
8	CONTACT PIN	NOTE 1	NOTE 5	1	10-03001-204- 8-0.4-B
7	SHELL	NOTE 1	NOTE 3	1	BS0000-1-B
6	GASKET	RUBBER	RED	1	GS-115/8X15
5	RETAINER RING	NOTE 1	NOTE 3	1	BS0000-5
4	SPRING	SK5	NOTE 4	1	BS0000-6
3	WASHER	NOTE 2	NOTE 3	1	WS-128/9X08
2	INSULATOR	NOTE 6	NATURAL	1	10-03001-204- 3-A
1	BODY	NOTE 1	NOTE 3	1	BS0000-2-36/24
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS		PART NO.
UNLESS OTHERWISE SPECIFIED		APPROVED
TOLERANCES		DATE
0.5-6 = ±0.2		11-05-02'
6-30 = ±0.4		
30-120 = ±0.6		CHECKED
120-315 = ±1		DATE
315-1000 = ±1.6		11-05-02'
1000-2000 = ±2.4		DRAWN
		DATE
		11-05-02'

Amphenol - Kai Jack		TAINAN TAIWAN
BNC CRIMP PLUG		TITLE
DRAWING NO. KJ-B1121A9-NT3G-FLEX-2-75		DRAWING NO.
ITEM NO. 011121AA38NA7F		ITEM NO.