


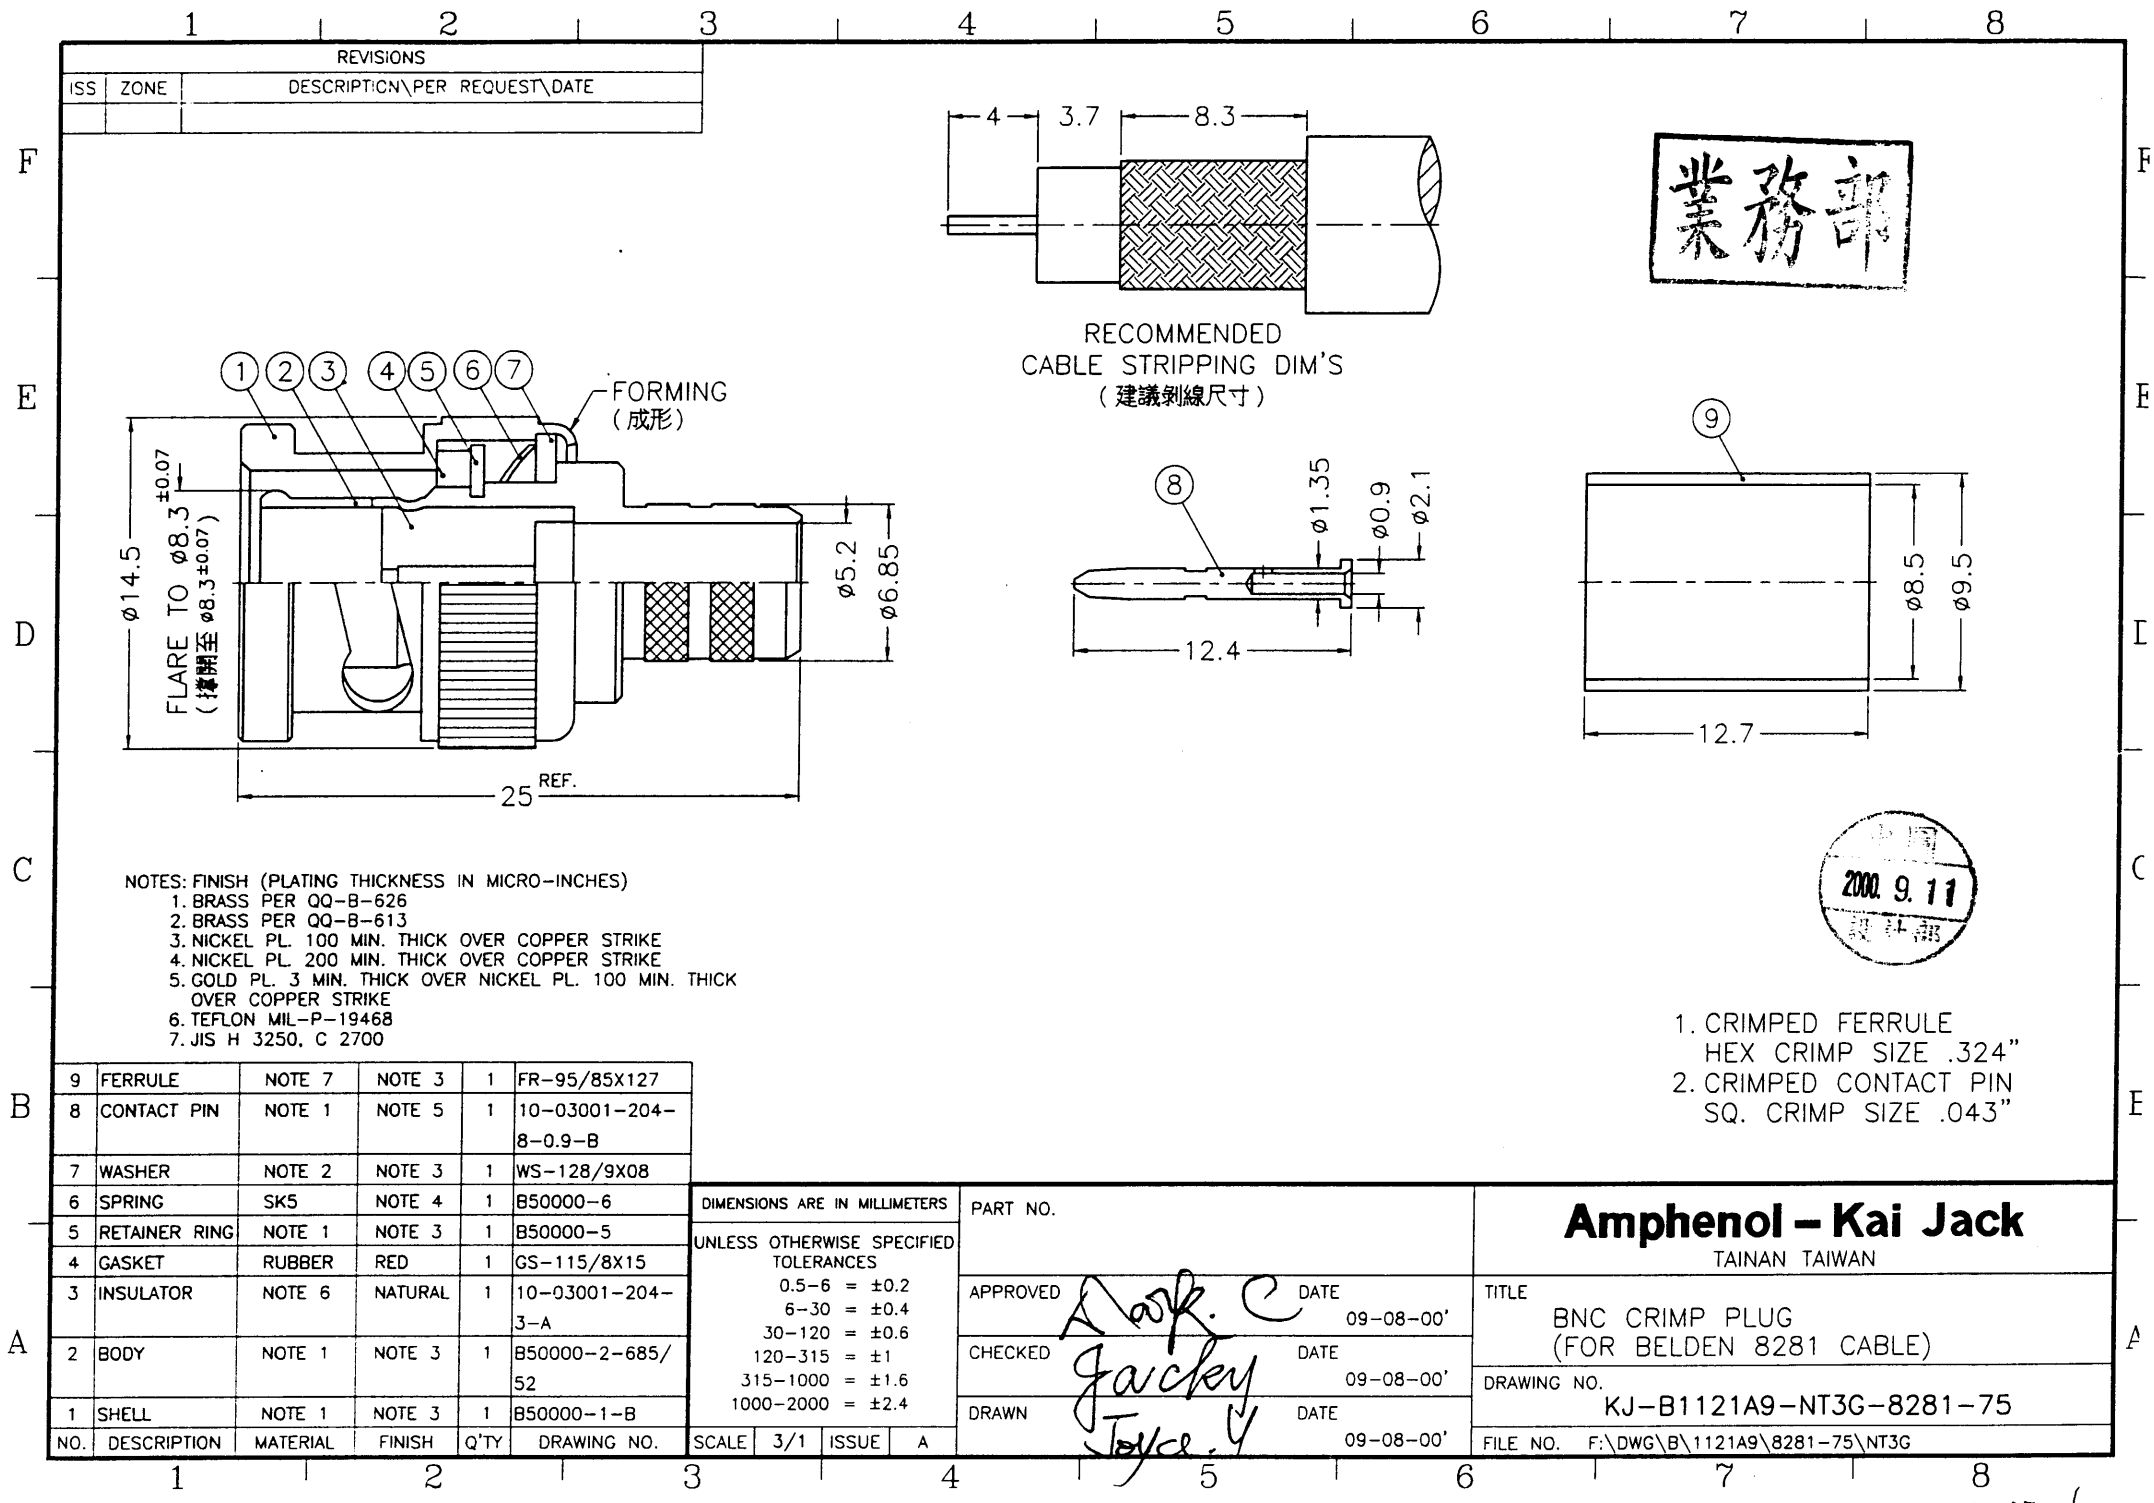

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- 1. BRASS PER QQ-B-626
 - 2. BRASS PER QQ-B-613
 - 3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - 4. NICKEL PL. 200 MIN. THICK OVER COPPER STRIKE
 - 5. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - 6. TEFLON MIL-P-19468
 - 7. JIS H 3250, C 2700

9	FERRULE	NOTE 7	NOTE 3	1	FR-95/85X127
8	CONTACT PIN	NOTE 1	NOTE 5	1	10-03001-204-8-0.9-B
7	WASHER	NOTE 2	NOTE 3	1	WS-128/9X08
6	SPRING	SK5	NOTE 4	1	B50000-6
5	RETAINER RING	NOTE 1	NOTE 3	1	B50000-5
4	GASKET	RUBBER	RED	1	GS-115/8X15
3	INSULATOR	NOTE 6	NATURAL	1	10-03001-204-3-A
2	BODY	NOTE 1	NOTE 3	1	B50000-2-685/52
1	SHELL	NOTE 1	NOTE 3	1	B50000-1-B

DIMENSIONS ARE IN MILLIMETERS			
UNLESS OTHERWISE SPECIFIED TOLERANCES			
0.5-6	=	±0.2	
6-30	=	±0.4	
30-120	=	±0.6	
120-315	=	±1	
315-1000	=	±1.6	
1000-2000	=	±2.4	

PART NO.	
APPROVED	DATE 09-08-00'
CHECKED	DATE 09-08-00'
DRAWN	DATE 09-08-00'

Amphenol - Kai Jack	
TAINAN TAIWAN	
TITLE BNC CRIMP PLUG (FOR BELDEN 8281 CABLE)	
DRAWING NO. KJ-B1121A9-NT3G-8281-75	
FILE NO. F:\DWG\B\1121A9\8281-75\NT3G	

- 1. CRIMPED FERRULE
HEX CRIMP SIZE .324"
- 2. CRIMPED CONTACT PIN
SQ. CRIMP SIZE .043"