

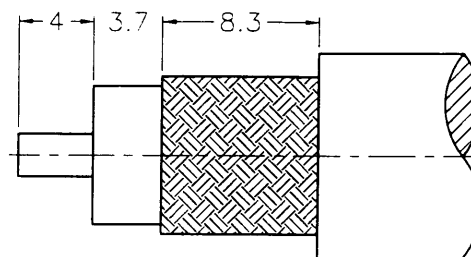
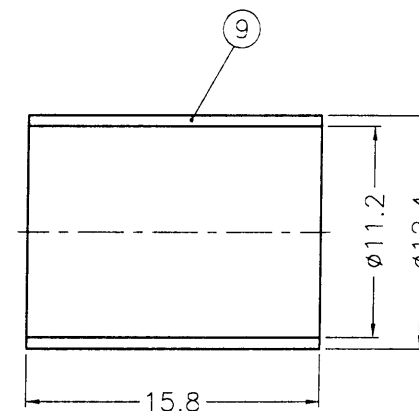


1		2	
REVISIONS			
ISS	ZONE	DESCRIPTION\APPROVED\DATE	

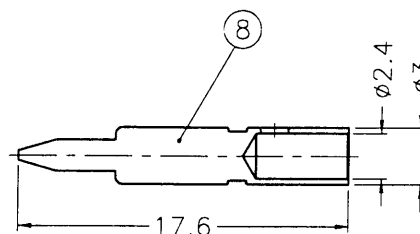

RECOMMENDED CABLE STRIPPING DIM'S

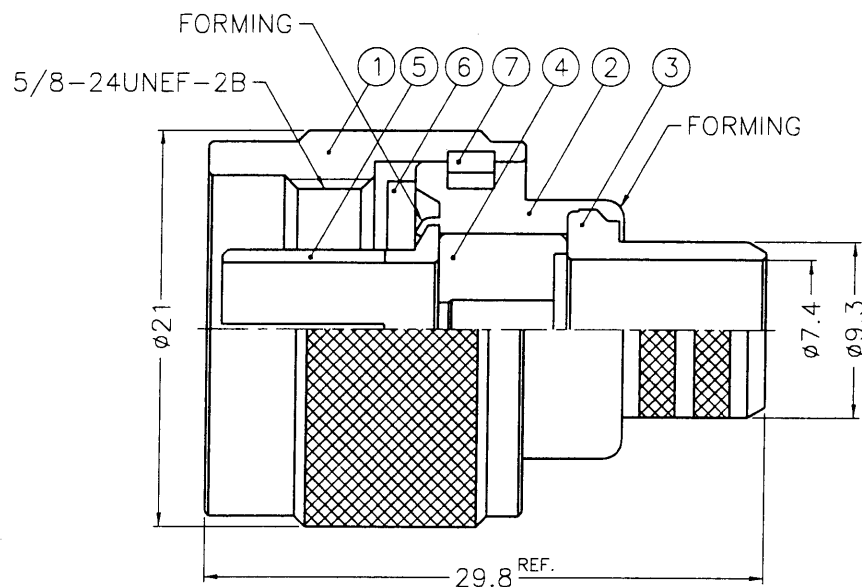

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
3. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. JIS H 3250, C 2700

9	FERRULE	NOTE 5	NOTE 2	1	FR-124/112X158
8	CONTACT PIN	NOTE 1	NOTE 3	1	N5000-8-3/24-C
7	RETAINER RING	SUS 304	NATURAL	1	N5000-7-C
6	GASKET	SILICONE	RED	1	GS-156/8X15
5	CONTACT BODY	NOTE 1	NOTE 2	1	N5000-5
4	INSULATOR	NOTE 4	NATURAL	1	N5000-4T-50-A
3	BARREL	NOTE 1	NOTE 2	1	N5000-3-93/74
2	BODY	NOTE 1	NOTE 2	1	N5000-2
1	SHELL	NOTE 1	NOTE 2	1	N5000-1-B
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS	
UNLESS OTHERWISE SPECIFIED TOLERANCES	
0.5-6	= ± 0.2
6-30	= ± 0.4
30-120	= ± 0.6
120-315	= ± 1
315-1000	= ± 1.6
1000-2000	= ± 2.4

PART NO.

APPROVED

CHECKED

DRAWN

DATE 08-20-98

DATE 08-20-98

DATE 08-20-98

TITLE

[illegible]

1



KAI JACK INDUSTRIAL CO., LTD.
TAINAN TAIWAN R.O.C.

TITLE

N CRIMP PLUG

DRAWING NO.

KJ-N1121A1-NT3G-214U-50

FILE NO.

F:\DWG\N\1121A1\214U-50\NT3G



8N-R1382