



REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
B	A-3	NO.4 WAS CHANGED\RD-DM91052301K\08-07-02'

SALES


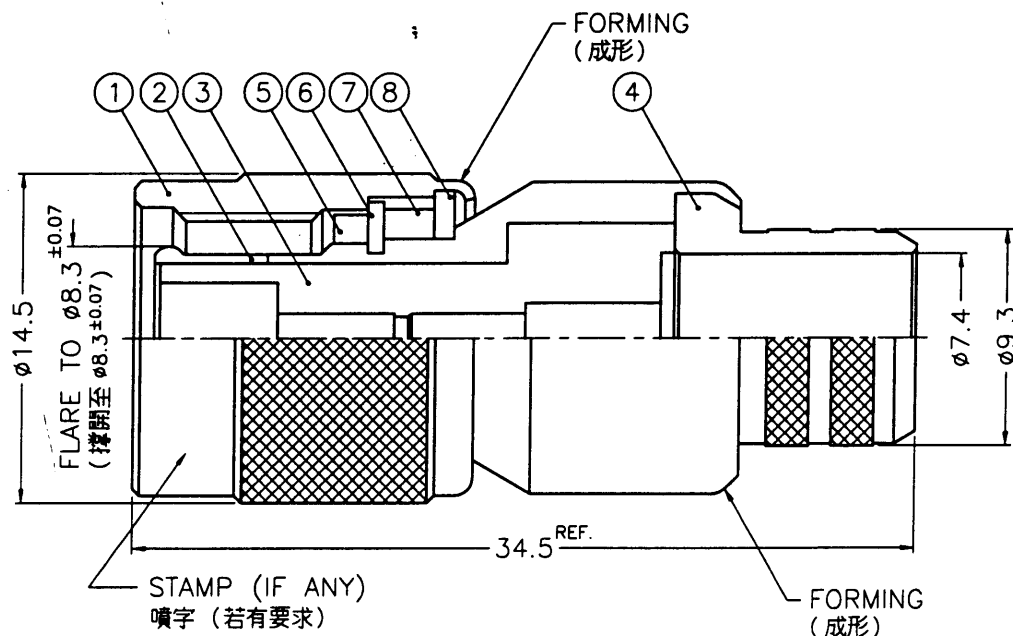


- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
 2. BRASS PER QQ-B-613
 3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 5. TEFLON MIL-P-19468
 6. JIS H 3250, C 2600

1. CRIMPED FERRULE
HEX CRIMP SIZE .429"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .100"

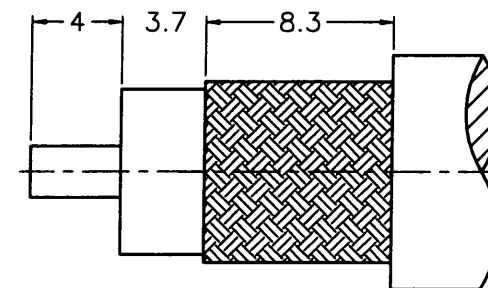

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

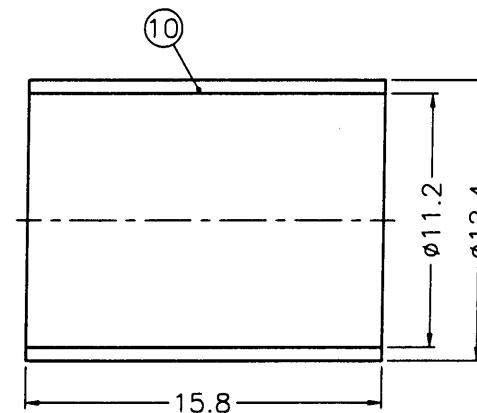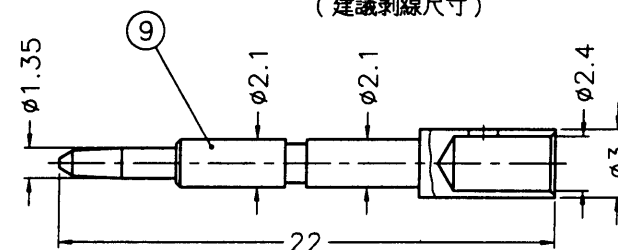

10	FERRULE	NOTE 6	NOTE 3	1	FR-124/112X158
9	CONTACT PIN	NOTE 1	NOTE 4	1	B5201-13-3/24
8	WASHER	NOTE 2	NOTE 3	1	WS-128/9X08
7	RING	DELIN	NATURAL	1	T50000-6-A
6	RETAINER RING	NOTE 1	NOTE 3	1	B50000-5
5	GASKET	RUBBER	RED	1	GS-105/8X15
4	BARREL	NOTE 1	NOTE 3	1	N5000-3-93/74 -B
3	INSULATOR	NOTE 5	NATURAL	1	B5201-3T-50
2	BODY	NOTE 1	NOTE 3	1	B1121A6-2
1	SHELL	NOTE 1	NOTE 3	1	T50000-1-B
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS			
UNLESS OTHERWISE SPECIFIED TOLERANCES			
0.5-6	=	±0.2	
6-30	=	±0.4	
30-120	=	±0.6	
120-315	=	±1	
315-1000	=	±1.6	
1000-2000	=	±2.4	
SCALE	3/1	ISSUE	B

PART NO.	
APPROVED	DATE 08-07-02'
CHECKED	DATE 08-07-02'
DRAWN	DATE 08-07-02'
FILE NO.	F:\DWG\T\1121A6\214U-50\NT3G

Amphenol - Kai Jack	
TAINAN TAIWAN	
TITLE	TNC CRIMP PLUG
DRAWING NO.	KJ-T1121A6-NT3G-214U-50
ITEM NO.	021121AAB24NA5F

7RD DR 15/36 8